

fastwarm[®]

WIFI THERMOSTAT

DATA SHEET



Set Temperature Range	5*c(41*f) – 40*c (104*f)
Back Lit Screen	Y
Non- Programmable Mode	Y
5/2 Day Programming Mode *	Y
7 Day Programming Mode **	Y
24 Hour Mode ***	Y
Set Points Per Day	4
Advance Function	N
Adaptive Function	Y
Holiday Mode	Y
Key Lock Function	Y
Temperature Hold Mode	Y
Temperature Override	Y
Temperature Override Limit	Y
Output Delay	N
Open Window Function	N
Energy Use Function	Y

Frost Protection (5*c-15*c)	Y
Day Light Saving Time (DST)	N
Temperature Format	*c – *f
Sensor Selection	Air / Floor / Both
Built in Air Sensor	Y
Remote Air Sensing Mode	N
Remote Floor Sensing Mode	Y
Remote Probe Included	Y
Modbus Function	N
Max Switch Load	16A (Electric) / 3A (Water)
Switching Differential	1*c – 3*c
Accuracy +/-	1*C
Wifi Functionality	Y
Supply	230v AC
Face Plate Dimensions LxWxD	87mm x 87mm x 16mm
Weight	150g
Back Box Requirement	35mm Single Gang

WIFI THERMOSTAT



DATA SHEET

FEATURE TABLE


Number	Name	Default	Ranges
1	Room temperature calibration	0.0°C	-5.0°C -- 5.0°C
2	Floor temperature calibration	0.0°C	-5.0°C -- 5.0°C
3	Anti-frozen function	ON	0F(OFF) ON
4	Anti-frozen temp	5.0°C	-5.0°C -- 15.0°C
5	Sensor selection	01: Floor sensor	00: Room sensor 01: Floor sensor 02: Both sensors
6	Floor temp limit	30.0°C	20.0°C -- 50.0°C
7	Temp unit	0.0°C	00: °C 01: °F
8	Output delay	00.00s	00: 00s 01: 30s 02: 60s 03: 90s
9	Temp deviation	01: 1.0°C	00: 0.5°C 01: 1.0°C 02: 2.0°C 03: 3.0°C
10	Reverse output	00: OFF	00: OFF 01: ON
11	Schedule	01: 5+1+1	00: 7 01: 5+1+1
12	Adaptive function	00: OFF	00: OFF 01: ON
13	Reset	00: No	00: NO 01: YES

WIFI THERMOSTAT


fastwarm®

DATA SHEET


PRODUCT DIMENSIONS

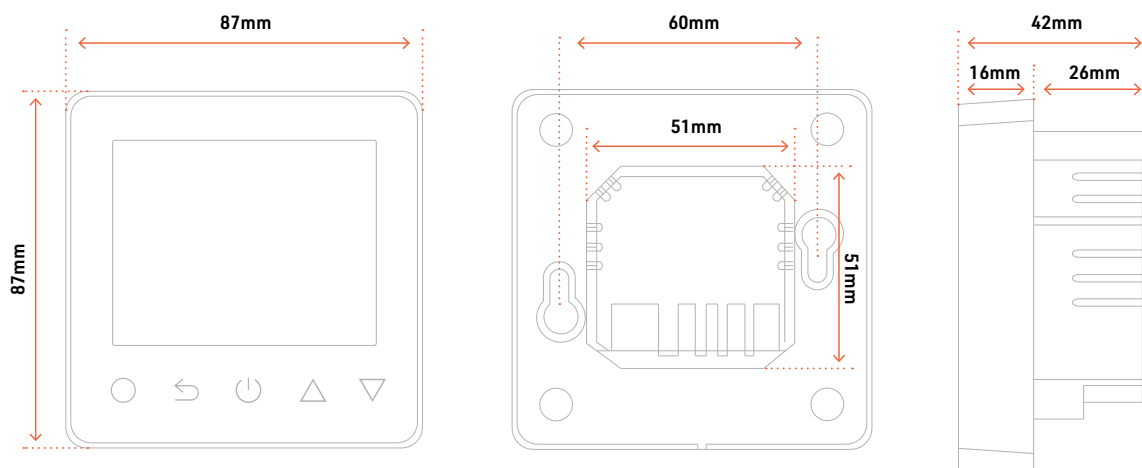

WIRING SPECIFICATION

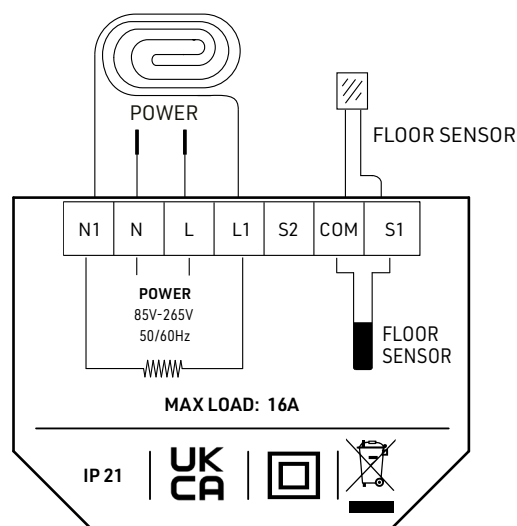

16A
Electric Underfloor Heating

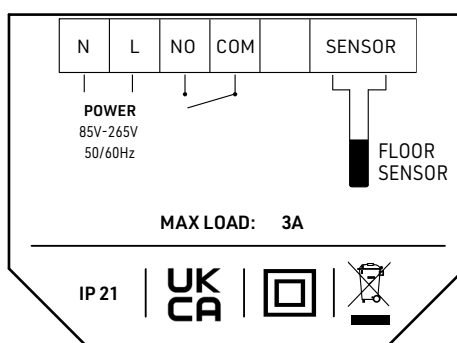

3A
Water Underfloor Heating