

fastwarm[®]



TOUCH THERMOSTAT

DATA SHEET

Set Temperature Range	5*c(41*f) – 50*c (122*f)
Back Lit Screen	Y
Non- Programmable Mode	Y
5/2 Day Programming Mode *	Y
7 Day Programming Mode **	Y
24 Hour Mode ***	N
Set Points Per Day	4
Advance Function	N
Adaptive Function	Y
Holiday Mode	Y
Key Lock Function	Y
Temperature Hold Mode	Y
Temperature Override	Y
Temperature Override Limit	Y
Output Delay	Y
Open Window Function	Y
Energy Use Function	Y

Frost Protection (5*c-15*c)	Y
Day Light Saving Time (DST)	N
Temperature Format	*c – *f
Sensor Selection	Air / Floor / Both
Built in Air Sensor	Y
Remote Air Sensing Mode	N
Remote Floor Sensing Mode	Y
Remote Probe Included	Y
Modbus Function	N
Max Switch Load	16A (Electric)
Switching Differential	0.5*c – 3*c
Accuracy +/-	1*C
Wifi Functionality	N
Supply	230v AC
Face Plate Dimensions LxWxD	136mm x 94mm x 15mm
Weight	175g
Back Box Requirement	35mm Single Gang

TOUCH THERMOSTAT



DATA SHEET

FEATURE TABLE


Number	Name	Default	Ranges
1	Room temperature calibration	0.0°C	-5.0°C -- 5.0°C
2	Floor temperature calibration	0.0°C	-5.0°C -- 5.0°C
3	Anti-frozen function	ON	OF(OFF) ON
4	Anti-frozen temperature	5.0°C	-5.0°C -- 15.0°C
5	Floor temperature limit	30.0°C	20.0°C -- 50.0°C
6	Temperature tolerance	1°C	0.5°C/1°C/2°C/3°C
7	Temperature unit	°C	°C / °F
8	Sensor selection	Floor	Room/Floor/Both
9	Schedule	5+1+1	5+1+1/7
10	Output delay	0s	0s/30s/60s/90s
11	Adaptive function	OFF	ON/OFF
12	Open window	OFF	ON/OFF
13	Power set	0w	0w -- 4500w
14	Energy use	0w	0w -- 4500w
15	Factory reset	NO	NO/YES

TOUCH THERMOSTAT

fastwarm®

DATA SHEET

PRODUCT DIMENSIONS

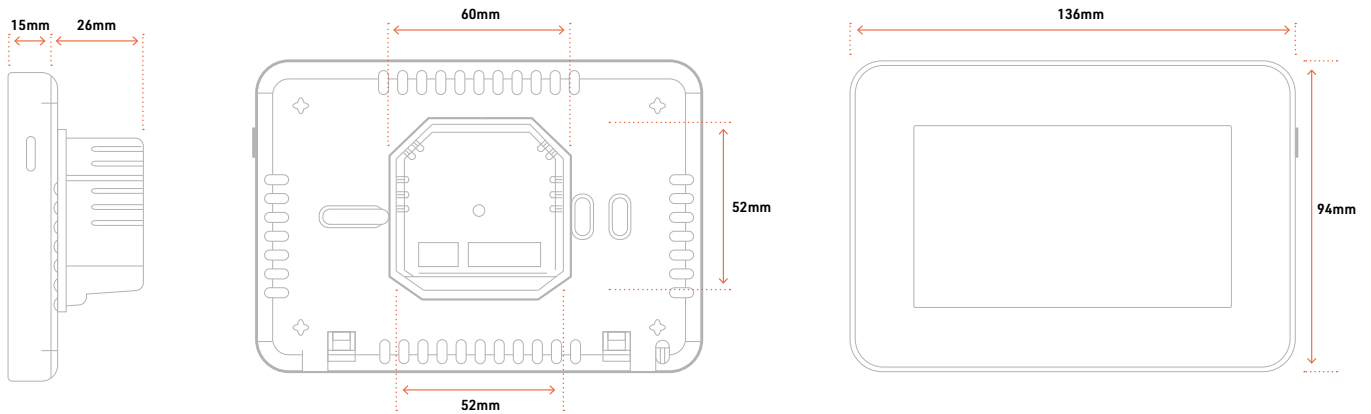

WIRING SPECIFICATION

